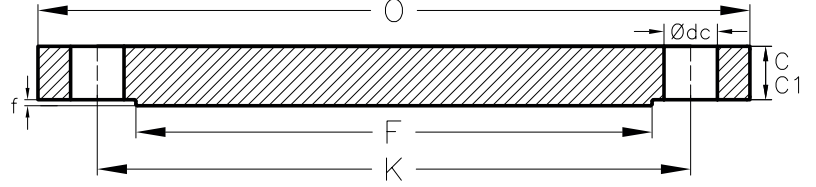


PN16 - EN 1092 - 1 TYPE 05 - DIN 2527


BORU (PIPE)	FLANŞ (FLANGE)					CİVATA (BOLT)				Ağırlık (Weight)
Çap Diameter	D	EN 1092-1	DIN 2527	F	f	Delik Sayısı (Bolt Holes)	Civata Çapı (Bolt Diameter)	dc	K	
		C	C1							
10	90	14	14	41	2	4	M12	14	60	0.63
15	95	14	14	46	2	4	M12	14	65	0.72
20	105	16	16	56	2	4	M12	14	75	1.01
25	115	16	16	65	2	4	M12	14	85	1.23
32	140	18	16	76	2	4	M16	18	100	1.8
40	150	18	16	84	2	4	M16	18	110	2.09
50	165	20	18	99	2	4	M16	18	125	2.88
65	185	20	18	118	2	8	M16	18	145	3.66
80	200	20	20	132	2	8	M16	18	160	4.77
100	220	22	20	156	2	8	M16	18	180	5.65
125	250	22	22	184	2	8	M16	18	210	8.42
150	285	24	22	211	2	8	M20	22	240	10.4
200	340	26	24	266	2	12	M20	22	295	16.1
250	405	28	26	319	2	12	M24	26	355	24.9
300	460	32	28	370	2	12	M24	26	410	35.1
350	520	35	30	429	2	16	M24	26	470	47.8
400	580	38	32	480	2	16	M27	30	525	63.5
450	640	42	34	548	2	20	M27	30	585	75
500	715	46	34	609	2	20	M30	33	650	102
600	840	52	36	720	2	20	M33	36	770	149.7
700	910	60	36	794	5	24	M33	36	840	173.7
800	1025	68	38	901	5	24	M36	39	950	235.5
900	1125	76	40	1001	5	28	M36	39	1050	298.8
1000	1255	84	42	1112	5	28	M39	42	1170	390.7
1200	1485	98	48	1328	5	32	M45	48	1390	624.8
1400	1685		52	1530	5	36	M45	48	1590	...
1600	1930		58	1750	5	40	M52	56	1820	...
1800	2130		62	1950	5	44	M52	56	2020	...
2000	2345		66	2150	5	48	M56	60	2230	...