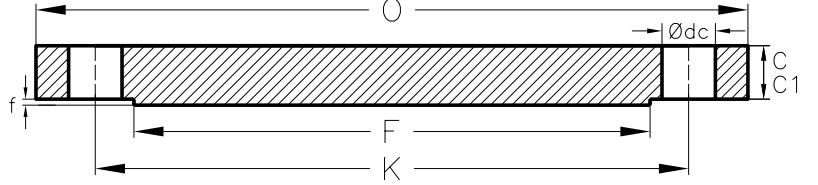


PN6 - EN 1092 - 1 TYPE 05 - DIN 2527


BORU (PIPE)	FLANŞ (FLANGE)					CİVATA (BOLT)				Ağırlık (Weight)
Çap Diameter	D	EN 1092-1	DIN 2527	F	f	Delik Sayısı (Bolt Holes)	Civata Çapı (Bolt Diameter)	dc	K	
		C	C1							
10	75	12	12	33	2	4	M10	11	50	0.38
15	80	12	12	38	2	4	M10	11	55	0.44
20	90	14	14	48	2	4	M10	11	65	0.65
25	100	14	14	58	2	4	M10	11	75	0.82
32	120	16	14	69	2	4	M12	14	90	1.17
40	130	16	14	78	2	4	M12	14	100	1.39
50	140	16	14	88	2	4	M12	14	110	1.62
65	160	16	14	108	2	4	M12	14	130	2.44
80	190	18	16	124	2	4	M16	18	150	3.43
100	210	18	16	144	2	4	M16	18	170	4.76
125	240	20	18	174	2	8	M16	18	200	6.11
150	265	20	18	199	2	8	M16	18	225	7.51
200	320	22	20	254	2	8	M16	18	280	12.3
250	375	24	22	309	2	12	M16	18	335	18.3
300	440	24	22	363	2	12	M20	22	395	25.3
350	490	24	22	413	2	12	M20	22	445	31.6
400	540	24	22	463	2	16	M20	22	495	38.4
450	595	24	24	518	2	16	M20	22	550	47
500	645	26	24	568	2	20	M20	22	600	60.4
600	755	30	24	677	2	20	M24	26	705	103
700	860	40	24	772	5	24	M24	26	810	178
800	975	44	24	878	5	24	M27	30	920	252
900	1075	48	26	978	5	24	M27	30	1020	336
1000	1175	52	26	1080	5	28	M27	30	1120	434
1200	1405	60	28	1295	5	32	M30	33	1340	720
1400	1630	68	32	1510	5	36	M33	36	1560	1110
1600	1830	76	34	1710	5	40	M33	36	1760	1550
1800	2045	84	36	1918	5	44	M36	39	1970	2100
2000	2265	92	38	2125	5	48	M39	42	2180	2850
2200	2475	...	42	2335	6	52	M39	42	2390	
2400	2685	...	44	2545	6	56	M39	42	2600	
2600	2905	...	46	2750	6	60	M45	48	2810	
2800	3115	...	48	2960	6	64	M45	48	3020	
3000	3115	...	50	3160	6	68	M45	48	3220	