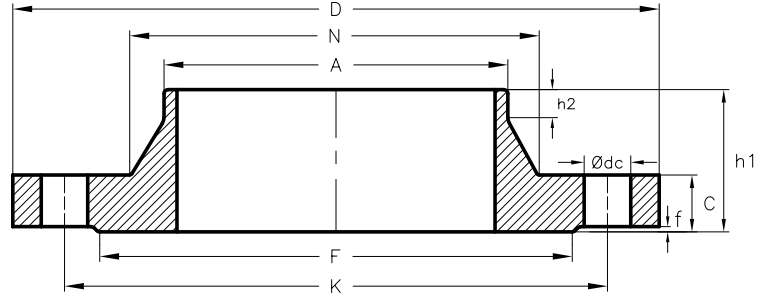


PN10 EN 1092-1 TYPE 11 - DIN 2632


BORU (PIPE)			FLANŞ (FLANGE)							CİVATA (BOLT)			
Çap Diameter	A		D	F	N	H1	C	H2	f	Delik Sayısı (Bolt Holes)	Civata Çapı (Bolt Diameter)	dc	K
	ISO	DIN											
10-150	17,2	14	Anma Basıncı 16 kgf/cm2 TS 811/4 Flanşa göre alınır										
	168,3	159											
200		219.1	340	295	234	62	24	16	2	8	M20	22	295
	216												
250	...	273	395	350	292	68	26	16	2	12	M20	22	350
	267	...											
300		323.9	445	400	342	68	26	16	2	12	M20	22	400
	318	...											
350	368	...	505	460	385	68	26	16	2	16	M20	22	460
	...	355.6											
400	419		565	515	440	72	26	16	2	16	M24	26	515
	...	406.4											
500	521		670	620	542	75	28	16	2	20	M24	26	620
		508											
600	622		780	725	642	80	28	18	5	20	M27	30	725
	...	610											
700	720	...	895	840	746	80	30	18	5	24	M27	30	840
		711											
800	820	...	1015	950	850	90	32	18	5	24	M30	33	950
		813											
900	920	...	1115	1050	950	95	34	20	5	28	M30	33	1050
		914.4											
1000	1020	...	1230	1160	1052	95	34	20	5	28	M33	36	1160
		1016											
1200	1219		1455	1380	1256	115	38	25	5	32	M36	39	1380
1400	1422		1675	1590	1460	120	42	25	5	36	M39	42	1590
1600	1626		1915	1820	1666	130	46	25	5	40	M45	48	1820
1800	1829		2115	2020	1868	140	50	30	5	44	M45	48	2020
2000	2032		2325	2230	2072	150	54	30	5	48	M45	48	2230
2200	2235		2550	2440	2275	160	58	35	5	52	M52	55	2440
2400	2438		2760	2650	2478	170	62	35	6	56	M52	55	2650
2600	2620		2960	2850	2680	180	66	40	6	60	M52	55	2850
2800	2820		3180	3070	2882	190	70	40	6	64	M52	55	3070
3000	3020		3405	3290	3085	200	75	45	6	68	M56	60	3290